


SWITCHING DIODE

FEATURES

- High Conductance
- Fast Switching
- Small Surface Mount device
- For General Purpose Switching Applications

**SOD-123****MECHANICAL DATA**

- Case: SOD-123
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Weight: 0.005 grams (approximate)

**MAXIMUM RATINGS** ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)





Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
DC Blocking Reverse Voltage	V_R	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	V
Forward Current	I_F	300	mA
Average Rectified Output Current	I_O	150	mA
Non-Repetitive Peak Forward Surge Current @ $t @ = 8.3\text{ms}$	I_{FSM}	2.0	A
Power Dissipation	P_D	350	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	250	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Forward voltage	V_F			0.71	V	$I_F = 1\text{mA}$
				0.855		$I_F = 10\text{mA}$
				1.0		$I_F = 50\text{mA}$
				1.25		$I_F = 150\text{mA}$
Reverse current	I_R			1	μA	$V_R = 75\text{V}$
Diode capacitance	C_D			2	pF	$V_R = 0\text{V}, f = 1\text{MHz}$
Reverse recovery time	T_{RR}			4	nS	$I_F = I_R = 10\text{mA}, I_{rr} = 0.1 I_R, R_L = 100\Omega$


SWITCHING DIODE

Typical Characteristics

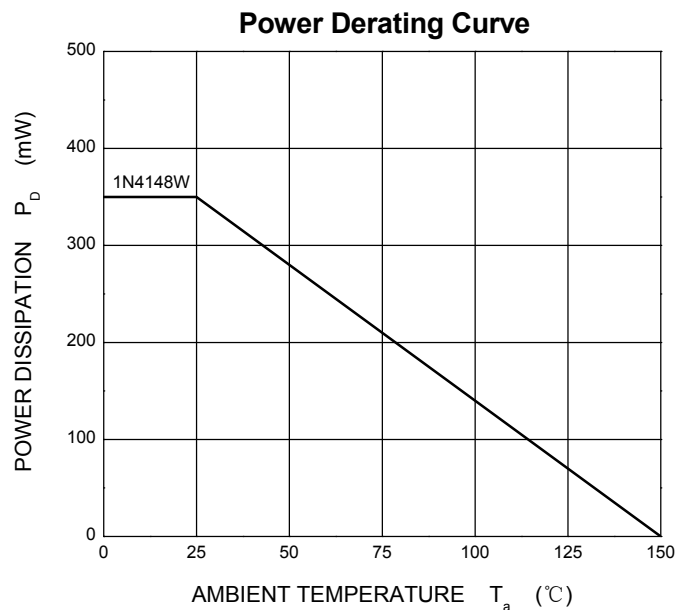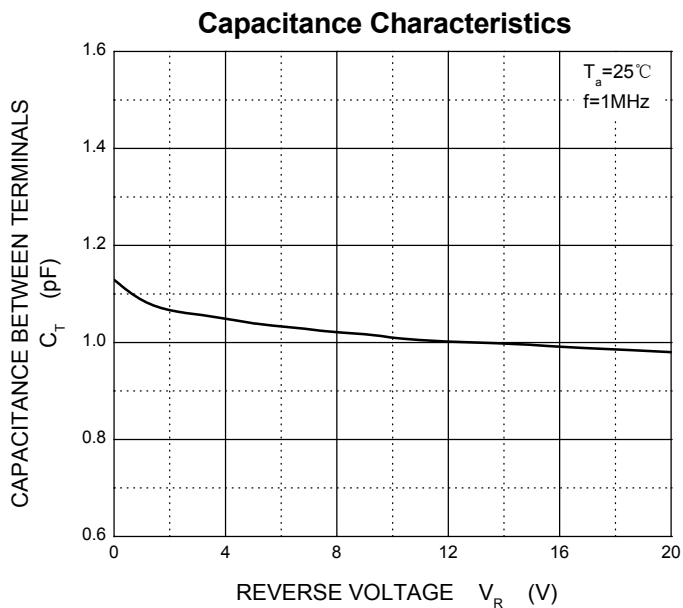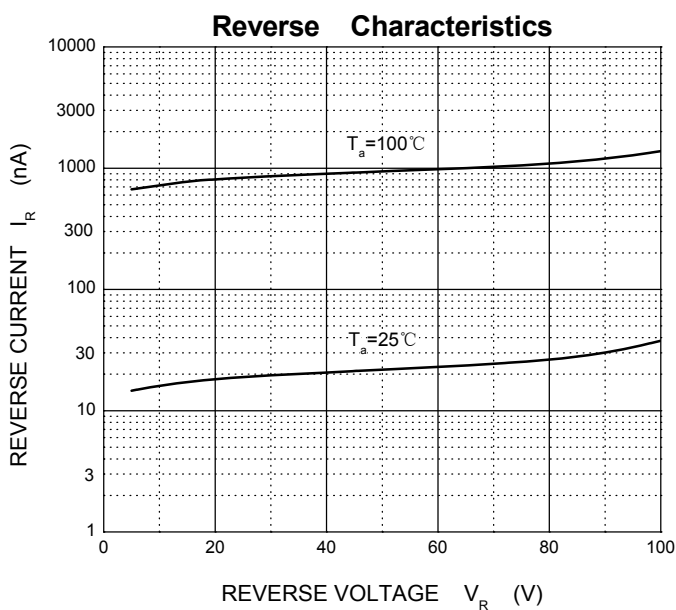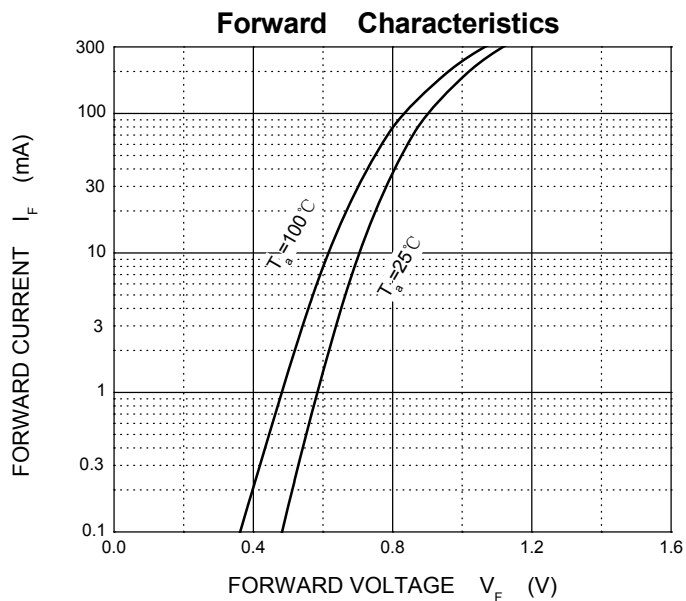


SWITCHING DIODE

SOD-123 Package Outline Dimensions

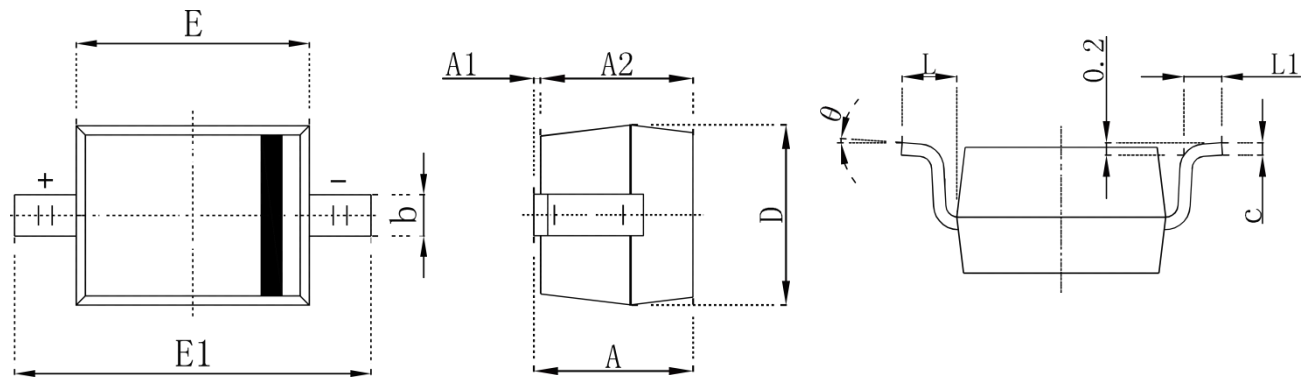

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	1.500	1.700	0.059	0.067
E	2.600	2.800	0.102	0.110
E1	3.550	3.850	0.140	0.152
L	0.500REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°

SOD-123 Suggested Pad Layout

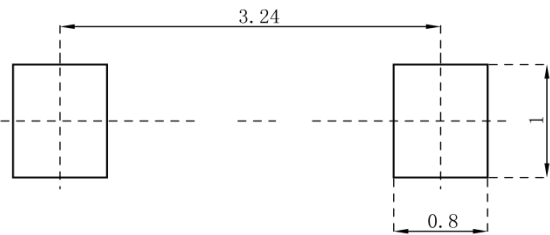


- Note:**
- 1.Controlling dimension: in millimeters
 - 2.General tolerance: ±0.05mm
 - 3.The pad layout is for reference purposes only

SWITCHING DIODE

SOD-123 Tape and Reel


SOD-123 Embossed Carrier Tape

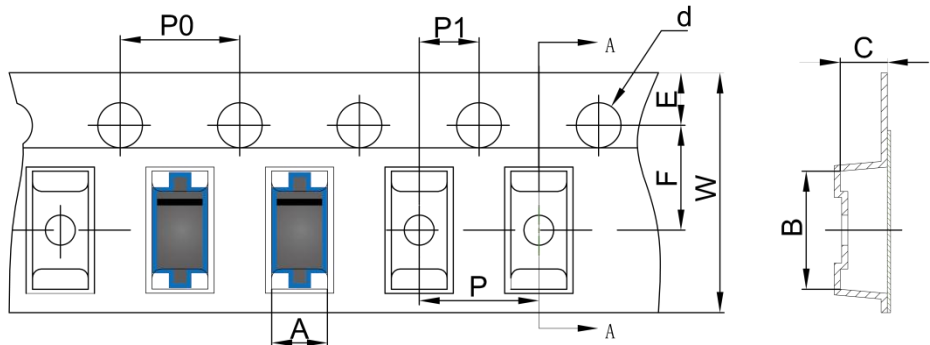

SOD-123 Tape Leader and Trailer

	DIMENSIONS ARE IN MILLIMETER									
TYPE	A	B	C	d	E	F	P0	P	P1	W
SOD-123	1.85	3.95	1.57	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

SOD-123 Reel

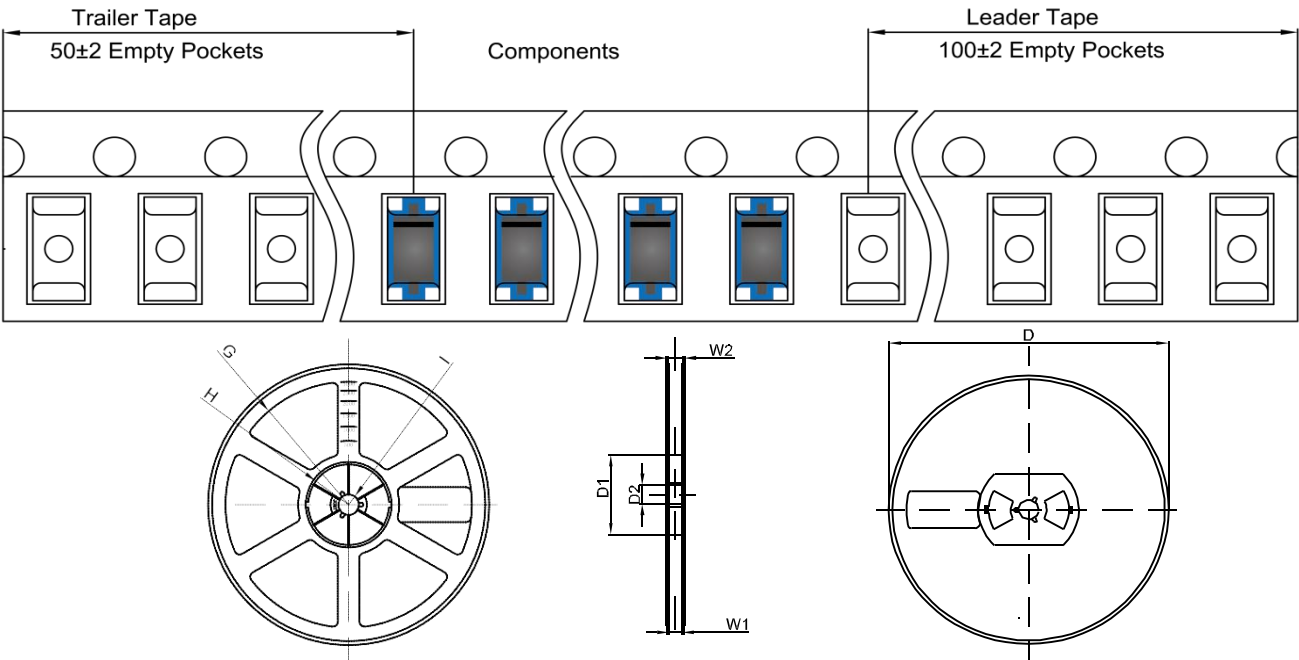

	DIMENSIONS ARE IN MILLIMETER							
REEL OPTION	D	D1	D2	G	H	I	W1	W2
7" DIA	Ø178	54.40	13.00	R78	R25.60	R6.50	9.50	12.30
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1